


INSTALLATION MANUAL

Bathtub Faucet

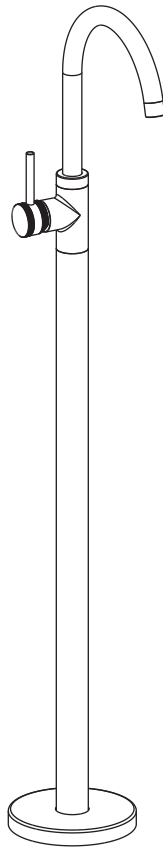

ENGLISH

SAFETY NOTES

- ⚠ WARNING: To prevent product failure, property damage, and personal injury, please follow these guidelines:
- ⚠ Regularly clean your CRANACH product as needed to prevent the buildup of mineral scale and/or soap residue.
- ⚠ Please refer to the Care And Cleaning when choosing a cleaning agent for this product. Avoid using cleaning products that contain chlorine bleach, lye, hydrochloric acid, formic acid, acetic acid, or abrasive materials.
- ⚠ FAILURE TO ADHERE TO THESE INSTRUCTIONS MAY LEAD TO PRODUCT DAMAGE, MALFUNCTION, AND VOIDING OF THE WARRANTY.

INSTALLATION CONSIDERATIONS

CRANACH recommends that this unit be installed by a licensed professional plumber.

Before starting the installation, please read these instructions carefully and make sure you have all the required tools and materials on hand.

TECHNICAL INFORMATION

Flow Rate: > 2.4 GPM @ 20 PSI

Warranty Services

Scan the QR code to quickly register and activate your product warranty or access warranty-related information.



cranachhome.com/warranty/

Installation Manual

Scan the QR code to instantly access the installation manual for your product. Download it to your device for convenient future reference and to ensure a smooth setup process.



cranachhome.com/installation/

Need instant assistant? Reach out via our 24-hour customer support line at 888.263.8999 or via email at support@cranachhome.com.


RECOMMENDED TOOLS TO PREPARE



Safety Glasses



Teflon Tape



Level




Hammer



Power Drill



Screwdriver




Pencil




Adjustable Wrench

PARTS IN THE BOX

Read over these instructions thoroughly before beginning installation. Make sure that you have all tools and supplies needed to complete the installation.




Installation Manual



Specification



Rubber Drain Hose




Spare Parts




Bathtub Stand Pipe



Water Supply Tube



Concealed Body




Main Body




Decorative cover


INSTALLATION

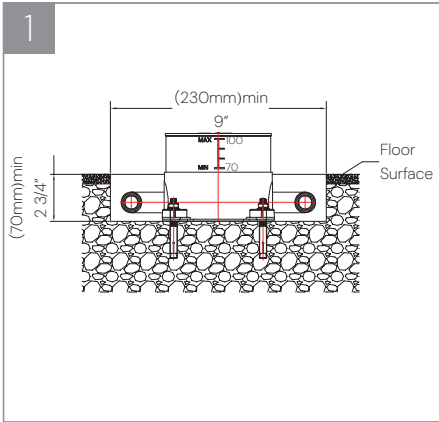


- 1.1 The installation depth of the embedded body is shown in diagram.
 1.2 The recommended opening size is $\varnothing 9"$ (230 mm) in diameter and 2 3/4" (70 mm) in depth.

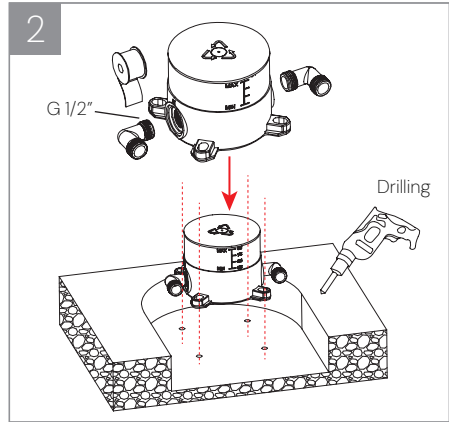


- 2.1 Place the embedded body into the prepared hole. Mark the screw hole positions with a pencil according to the mounting holes, then drill the corresponding holes using an electric drill.
 2.2 If necessary, install the G 1/2" water pipe connectors onto the embedded body as shown in the diagram.
 The left side is for the hot water inlet, and the right side is for the cold water inlet.
 (The water pipe connectors should be prepared by the installer.)

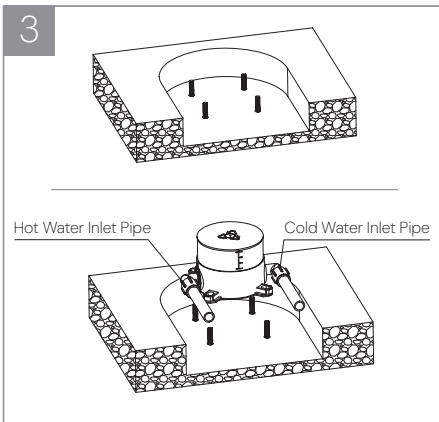


- 3.1 Insert the expansion bolts into the drilled holes.
 3.2 Align the embedded body with the screw holes and install it as shown in the diagram. Ensure the embedded box is kept level using the top level indicator.

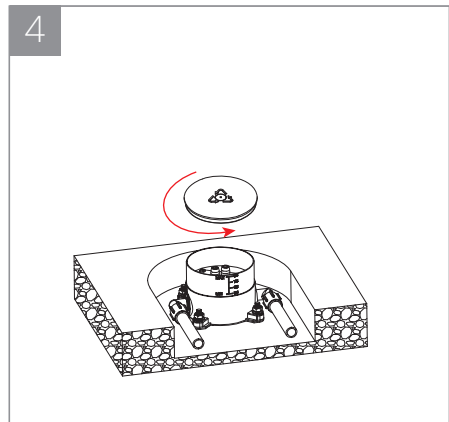


4. Turn the cover on top of the embedded box counterclockwise to remove it.

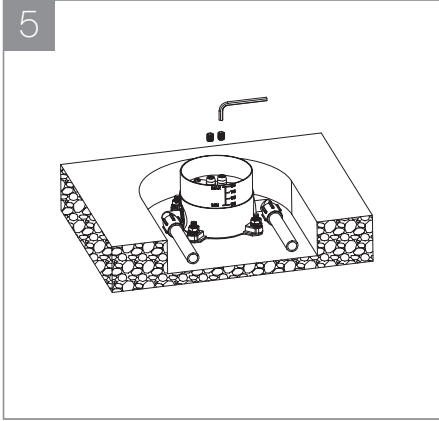


5. Use a hex wrench to unscrew the 2 gravel drain bolts inside the leak test plastic plug.

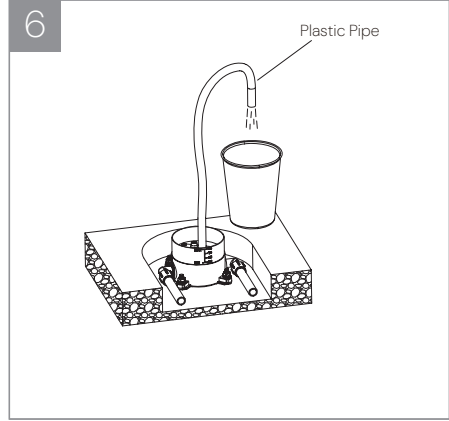


6. Prepare a bucket, insert the plastic tube into the top of the leak test plastic plug, then open the corresponding inlet valves one by one to drain the gravel and dirt remaining in the pipes.

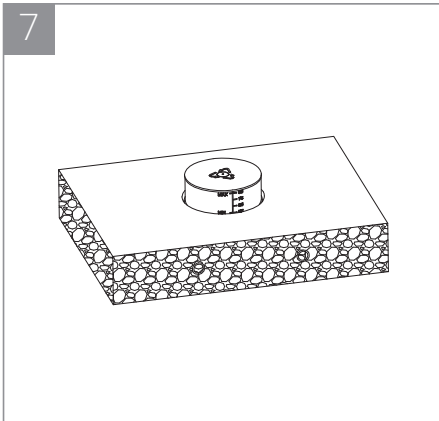


7.1 After draining is completed, retighten the two screws and reinstall the cover of the pre-installed box.
7.2 Refill sand and cement, and lay the floor tiles again.

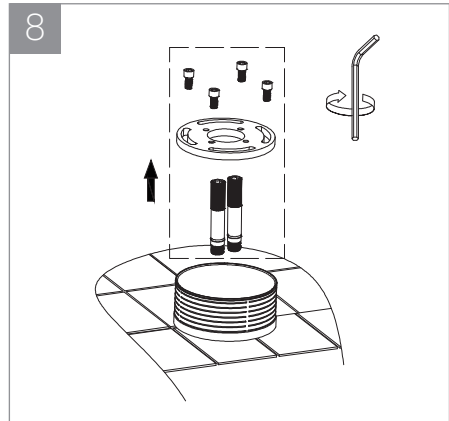

8. Remove the plate and plug by hexagon screw.

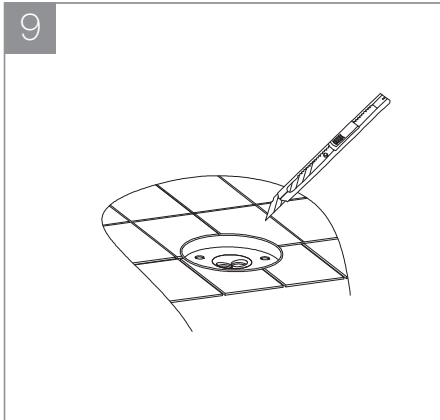


9. Use a knife to cut the embedded box along the tile surface.

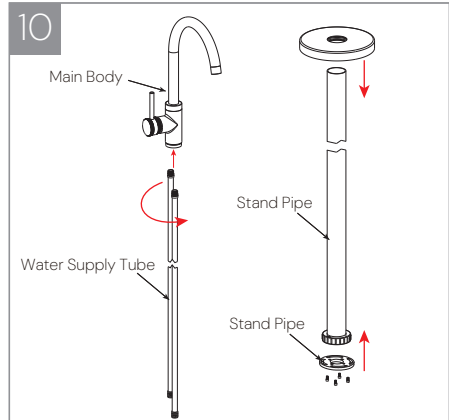

10.1 Screw the water supply tube clockwise into the hot and cold water inlet holes at the bottom of the main body.

10.2 Use pliers to take out the leak-testing plug.

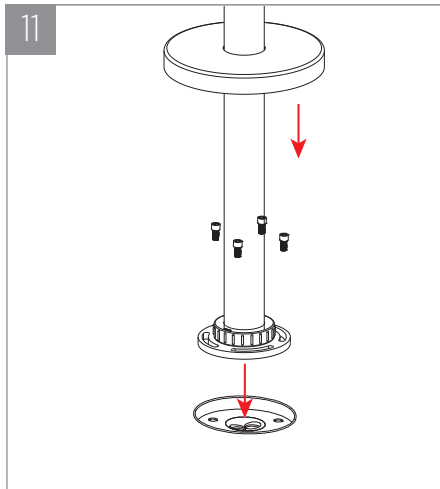

11.1 As shown in the figure, connect the base to the pre-installed body, align the screw holes, and tighten the screws.

11.2 Then push the decorative cover downward until it contacts the floor.



12. The faucet is now fully installed. Turn on the hot and cold water supply and check all connections for leaks before use.

WARRANTY

Parts and Finishes:

CRANACH warrants all parts (excluding electronic components and batteries) and finishes of this product, purchased from authorized CRANACH sellers, to be free from defects in material and workmanship.

- Residential Use:
Lifetime warranty, for as long as the original consumer purchaser owns the home in which the product is installed.
- Commercial or Multi-Family Use:
For a period of ten (10) years from the date the product is received by the original purchaser or their authorized representative.

Electronic Components:

If applicable, electronic components (excluding batteries) of CRANACH products purchased from cranachhome.com or authorized CRANACH sellers are warranted to the original consumer purchaser to be free from defects in material and workmanship.

- Residential Use:
For a period of five (5) years from the date the product is received.
- Commercial or Multi-Family Use:
For a period of one (1) year from the date the product is received.

What We Will Do:

During the applicable warranty period, if a defect is found in material or workmanship under normal installation, use, and service, CRANACH will provide replacement parts free of charge. Before returning your product to CRANACH, please visit our website or contact our customer service team (via phone or email) for troubleshooting assistance.

Exclusions & Limitations:

This warranty does not cover:

- Damage caused by abuse, misuse, improper care, lack of maintenance, or improper installation.
- Damage from freezing water or excessive water pressure.
- Damage from abrasive cleaning products or use in violation of applicable codes or regulations.
- Labor charges incurred during installation, removal, or repair of the product.
- Incidental or consequential damages.



7933 Ley Rd
Houston, TX, 77028
cranachhome.com