

FEATURES

- Rain Spray
 Wide and even water flow, relaxing and spa-like sensation.
- Brass Ball Joint
 Durable adjustable joint, easy positioning of the showerhead.
- Easy Clean Spray Nozzles
 Lime and calcium buildup prevention,
 hassle-free maintenance.
- Solid Stainless Construction
 Premium stainless steel, durable and rust-resistant.

SPECIFICATION

- Rotation angle ±15°
- 1/2" NPT female connection
- Finish Availability: Polished Chrome/ Matte Black/Brushed Nickel/Brushed Gold
- Size: Ø 5 7/8" (150mm)
- Shower arm and flange not included

FLOW

■ 1.75 GPM @ 80 PSI MAX

WARRANTY


Parts and Finish: Limited lifetime warranty for residential, or 10 years for commercial purchasers and multi-family (apartments and condominiums) residential, in each case from the date of purchase.

STANDARDS

■ ASME A112.18.1/CSA B125.1

Cranach deserves the right to make changes in specifications and materials and to change or discontinue models both without notice or obligation. Dimensions are only for reference only. R100 C40.R101



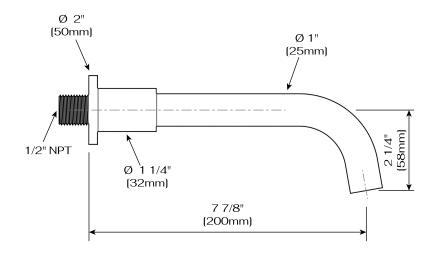

FEATURES

- Easy Wipe Clean
 Chemical-free cleaning, effortless
 maintenance on frequently touched areas.
- All Metal Construction Durable metal build, superior strength and long-lasting reliability.
- One Piece Installation
 Seamless design, no loose parts or on-site reassembly needed.

SPECIFICATION

- 1/2" NPT male connection
- Finish Availability: Polished Chrome/ Matte Black/Brushed Nickel/Brushed Gold

FLOW

■ 1.75 / 2.5 GPM @ 20 PSI MAX

WARRANTY

Parts and Finish: Limited lifetime warranty for residential, or 10 years for commercial purchasers and multi-family (apartments and condominiums) residential, in each case from the date of purchase.


STANDARDS


■ ASME A112.18.1/CSA B125.1


Cranach deserves the right to make changes in specifications and materials and to change or discontinue models both without notice or obligation.

Dimensions are only for reference only.







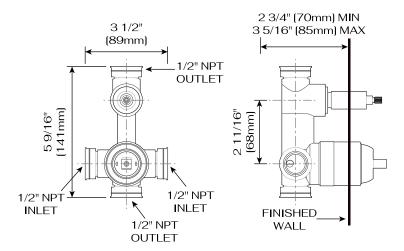

FEATURES

- Pressure Balance Valve
 Consistent water temperature, enhanced safety, and reliable performance.
- 2 Outlets
 Dual-function diverter, supports two separate water flow positions.
- Corrosion-Resistant Finish Resilient coating, defense against corrosion and wear.
- All Metal Construction
 Durable metal build, superior strength and long-lasting reliability.

SPECIFICATION

- Top knob controls diverter functions
- Bottom handle controls volumn and temperature
- H/C indicator markings
- Inlet 1/2" NPT male connection
- Outlet 1/2" NPT male connection
- Finish Availability: Polished Chrome/ Matte Black/Brushed Nickel/Brushed Gold
- Cartridges included

FLOW

■ 6.5 GPM @ 80 PSI MAX

WARRANTY


Parts and Finish: Limited lifetime warranty for residential, or 10 years for commercial purchasers and multi-family (apartments and condominiums) residential, in each case from the date of purchase.

STANDARDS

■ ASME A112.18.1/CSA B125.1

Cranach deserves the right to make changes in specifications and materials and to change or discontinue models both without notice or obligation. Dimensions are only for reference only.



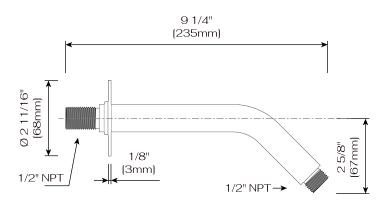

FEATURES

- All Metal Construction Durable metal build, superior strength and long-lasting reliability.
- Easy Wipe Clean
 Chemical-free cleaning, effortless
 maintenance on frequently touched areas.

SPECIFICATION

- Wall-mounted
- 1/2" NPT male connection
- Shower arm and flange included

WARRANTY

Parts and Finish: Limited lifetime warranty for residential, or 10 years for commercial purchasers and multi-family (apartments and condominiums) residential, in each case from the date of purchase.

STANDARDS

■ ASME A112.18.1/CSA B125.1

Cranach deserves the right to make changes in specifications and materials and to change or discontinue models both without notice or obligation. Dimensions are only for reference only.