


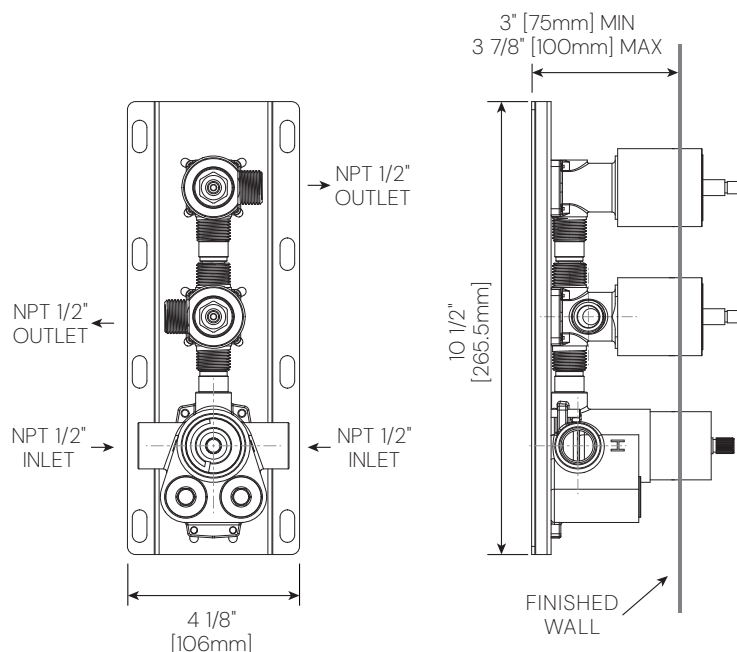

FEATURES

- Thermostatic Valve
Precise temperature control, reliable operation, and improved user safety.
- 2 Outlets
Two independent diverters, support two separate water flow positions.

SPECIFICATION

- Thermostatic cartridge locks temperature at 38°C/100°F
- Top & Middle knobs control diverter functions
- Bottom knob controls temperature
- Inlet: NPT 1/2" female connection
- Outlet: NPT 1/2" male connection
- Cartridges included

FLOW

- 8.5 GPM @ 80 PSI MAX

WARRANTY

- Parts and Finish: Limited lifetime warranty for residential, or 10 years for commercial purchasers and multi-family (apartments and condominiums) residential, in each case from the date of purchase.

STANDARDS

- ASME A112.18.1/CSA B125.1

Cranach deserves the right to make changes in specifications and materials and to change or discontinue models both without notice or obligation. Dimensions are only for reference only.