


CRANACH®

INSTALLATION MANUAL

Floor Drain

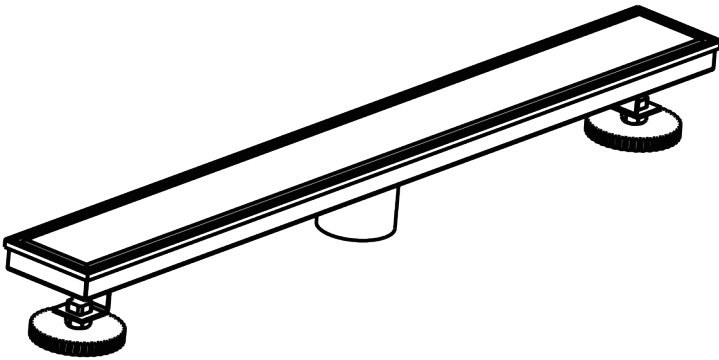

C82.SD07

ENGLISH

SAFETY NOTES

- ⚠ WARNING: To prevent product failure, property damage, and personal injury, please follow these guidelines:
- ⚠ The shower is designed exclusively for bathing, personal hygiene, and body cleaning purposes.
- ⚠ The shower arm is intended solely to support the showerhead. Do not hang any additional items from the shower arm.
- ⚠ Regularly clean your CRANACH product as needed to prevent the buildup of mineral scale and/or soap residue.
- ⚠ Please refer to the Cleaning Recommendations when choosing a cleaning agent for this product. Avoid using cleaning products that contain chlorine bleach, lye, hydrochloric acid, formic acid, acetic acid, or abrasive materials.
- ⚠ FAILURE TO ADHERE TO THESE INSTRUCTIONS MAY LEAD TO PRODUCT DAMAGE, MALFUNCTION, AND VOIDING OF THE WARRANTY.

INSTALLATION CONSIDERATIONS

CRANACH recommended that this unit be installed by a licensed professional plumber.

Before starting the installation, please read these instructions carefully and make sure you have all the required tools and materials on hand.

To avoid the risk of scalding, ensure that the maximum output temperature of the shower mixing valve (not included) does not exceed 120°F (49°C).

Keep this booklet and the receipt (or other proof of date and place of purchase) for this product in a safe place. The receipt is required should it be necessary to request warranty parts.

We're Here to Help!
Visit our Support Center for detailed product guides, warranty policies, and troubleshooting tips. Need instant assistance? Reach out via live chat or email us directly at support@cranachhome.com. For your convenience, we've provided quick access through the following QR codes:

Warranty Services
Scan the QR code below to quickly register your product warranty or access warranty-related information, ensuring peace of mind while using our products.



cranachhome.com/warranty/

TOOLS REQUIRED



Safety Glasses



Teflon Tape



Allen Key




Adjustable Wrench


PARTS IN THE BOX

Read over these instructions thoroughly before beginning installation. Make sure that you have all tools and supplies needed to complete the installation.

C82.SD07



Installation Manual




Warranty Card



Threaded Adapter




Fixing Screw



Shower Drain Grate




Hair Strainer



Shower Drain Body




Upper Flange




Drain Base Flange

INSTALLATION

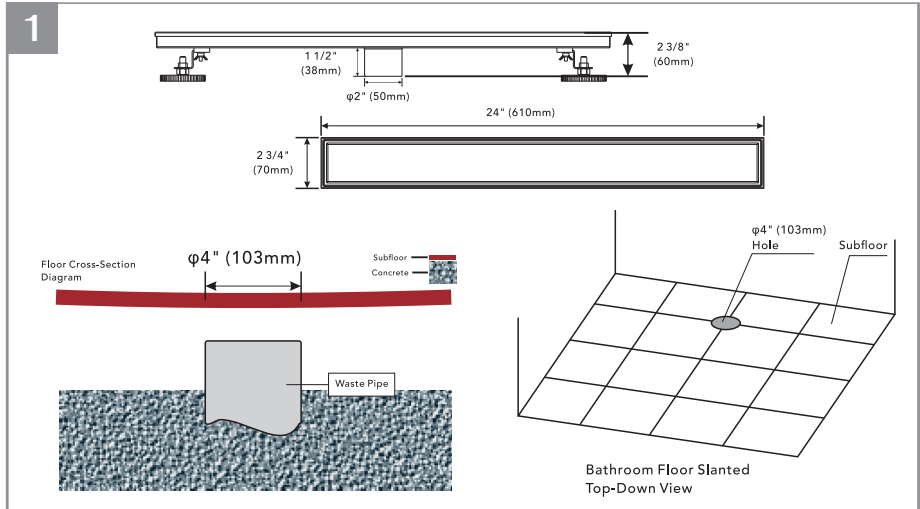


1. Locate the position of the bathroom waste pipe, and use a tool to cut a hole with dimensions as shown in the diagram (4" 103mm).
2. Be careful not to let debris fall into the waste pipe to avoid damaging or clogging the drainage system.

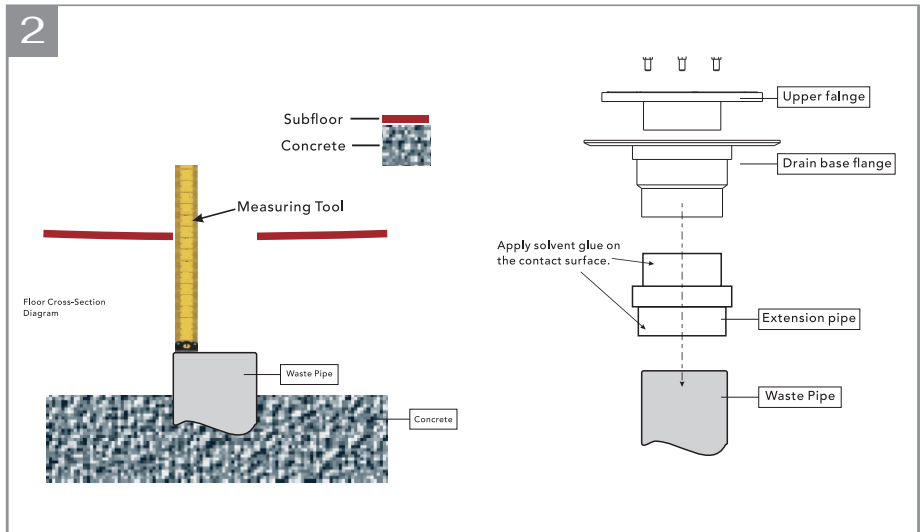

3. Use a measuring tool to check if the depth of the waste pipe meets the required installation depth for the shower drain body. The top of the waste pipe must extend into the bottom of the shower drain body by 1"(25mm)-1 1/8"(28mm)"
4. Cut a suitable extension pipe to connect the drain base flange and the waste pipe. Secure the drain base flange with 4 screws.

INSTALLATION


3

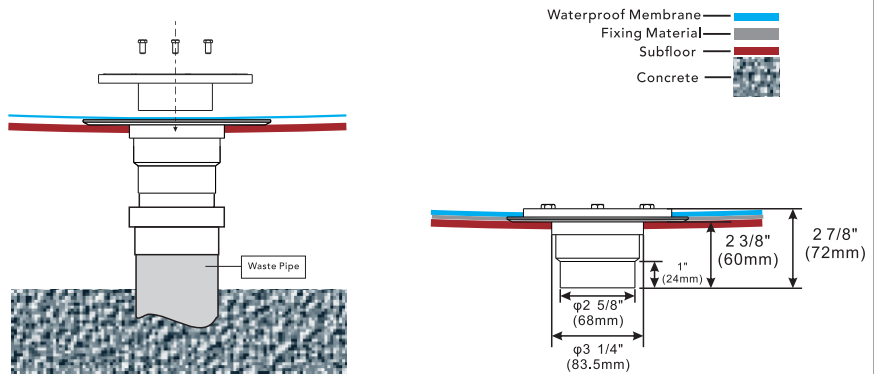

5. Spread a layer of mortar/concrete/other fixing materials on the subfloor, and use a level to measure the height. The finished floor should be flush with the flange.

6. Loosen the fixing screws of the upper flange and remove the upper flange. Lay the cut waterproof membrane in place. Cut openings for the screw holes and drain hole at the corresponding positions, then reinstall the upper flange. Once the fixing material has dried, the flange installation is complete.


4

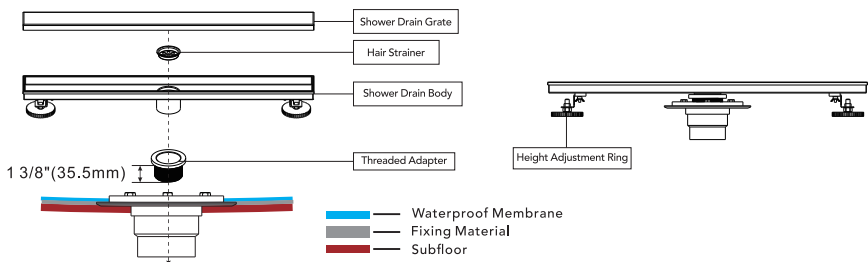

7. Install the floor drain and connecting flange from bottom to top according to the diagram. If the ground is uneven, adjust the height using the adjustment rings on both sides until level. (It is recommended to adjust the Threaded Adapter by no more than 1 1/8" (30mm); over-adjustment may risk detachment.)

INSTALLATION

5

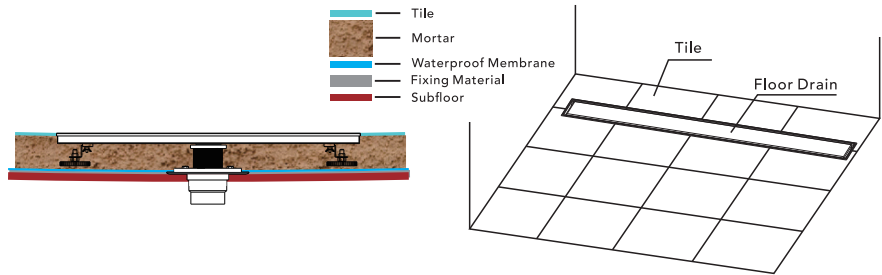

8. First, measure the thickness of the floor surface materials such as tiles/wooden boards. Spread mortar onto the waterproof membrane, leaving space for the thickness of the tiles. Use a level to ensure it is even. Finally, lay the tiles to complete the floor drain installation.

CRANACH®

7933 Ley Rd Houston, TX, 77028

24hours Hotline:
+ (1) 888-263-8999

Email:
info@cranachhome.com

CR_INSTALLATION_V1.0_202501

WARRANTY

Parts and Finish:

All parts (excluding electronic parts and batteries) and finishes of CRANACH products purchased from authorized CRANACH sellers are warranted to the original consumer purchaser to be free from defects in material and workmanship for as long as the original consumer purchaser owns the home in which the faucet(s) are installed.

For commercial purchasers or multi-family residential properties (such as apartments and condominiums), the warranty period is 10 years from the date the product is received by the original purchaser or their authorized representative (e.g., installation contractor).

Electronic Parts:

Electronic parts (excluding batteries), if applicable, that are part of CRANACH products purchased from cranachhome.com or authorized CRANACH sellers are warranted to the original consumer purchaser to be free from defects in material and workmanship for 5 years from the date the product is received for residential use, 1 year for commercial purchasers. Batteries are not covered under this warranty.

What We Will Do:

If a defect is found during the applicable warranty period, CRANACH will provide replacement parts free of charge. This includes any part or finish that proves defective in material or workmanship under normal installation, use, and service. Before returning your faucet to CRANACH, please visit our website or contact our customer service team (via phone or email) for troubleshooting assistance.

Exclusions & Limitations:

This warranty does not cover damage caused by abuse, misuse, or improper care, lack of maintenance or improper installation, freezing water or excessive water pressure, abrasive cleaning products, or use in violation of applicable codes or regulations. Labor charges incurred during installation, repair, or replacement, damage incurred during installation or removal, or incidental or consequential damages, are excluded.

CARE AND CLEANING

Gently clean the product with clear water and wipe dry using a soft, lint-free cloth. Do not use soaps, acid, polish, abrasives or rough materials that may damage the surface.